

Elektrischer Fensteröffner electric window opener

KETTENANTRIEB CHAIN DRIVE

HCV 24 VDC

HCVA 230 VAC



WIR BEWEGEN FENSTER. WE ARE MOVING WINDOWS.

- Für alle Fenster und Lichtkuppeln
 - Mikroprozessorgesteuerte Elektronik
 - Hublängen bis 1500 mm
 - Einsetzbar für Natürliche Lüftung und RWA
 - Bis 500 N Druck und Zuglast
 - Programmierbare Parameter
 - Synchronbetrieb bis zu 16 Antriebe als S Version
 - Spannungsversorgung 24 VDC und 230 VAC
 - Softclosefunktion
 - 1,5 m Silikon Kabel
 - Gehäuse in Aluminium/silber
- For all windows and skylights
 - Microprocessor controlled
 - Chain lengths up to 1500 mm
 - For natural and smoke ventilation
 - Up to 500 N force
 - Programmable settings
 - Synchron operation up to 16 drives with S option
 - Power supply 24 VDC (HCV) and 230 VAC (HCVA)
 - Softclose function
 - 1,5 m Silicon cable
 - Housing coated silver

HCV 24 VDC
HCVA 230 VAC




Technische Daten / technical data



Model	Versorgung Power supply	Druck / Zuglast Pushing / Pulling Force (N)	Geschwin- digkeit Speed	Zuhaltung locking pressure	Schutz- art Protec- tion	Temperatur Temperature	Hublänge Stroke Lenght (mm)	Abmessung Size L*W*H* (mm)
HCV 300/350	24 VDC / 0,9 A	300 / 300	6,8 mm/sec	2000 N	IP 32	-5°C - 55°C	350	436*51*40*
HCV 300/600	24 VDC / 0,9 A	300 / 300	6,8 mm/sec	2000 N	IP 32	-5°C - 55°C	600	561*51*40*
HCV 300/800	24 VDC / 0,9 A	300 / 300	6,8 mm/sec	2000 N	IP 32	-5°C - 55°C	800	661*51*40*
HCV 500/350	24 VDC / 1,4 A	500 / 500	6,8 mm/sec	2000 N	IP 32	-5°C - 55°C	350	436*51*40*
HCV 500/600	24 VDC / 1,4 A	500 / 500	6,8 mm/sec	2000 N	IP 32	-5°C - 55°C	600	561*51*40*
HCV 500/800	24 VDC / 1,4 A	500 / 500	6,8 mm/sec	2000 N	IP 32	-5°C - 55°C	800	661*51*40*

Model	Versorgung Power supply	Druck / Zuglast Pushing / Pulling Force (N)	Geschwin- digkeit Speed	Zuhaltung locking pressure	Schutz Protec- tion	Temperatur Temperature	Hublänge Stroke Lenght (mm)	Abmessung Size L*W*H* (mm)
HCVA 300/350	230 VAC / 25 VA	300 / 300	6,8 mm/sec	2000 N	IP 32	-5°C - 55°C	350	586*51*40*
HCVA 300/600	230 VAC / 25 VA	300 / 300	6,8 mm/sec	2000 N	IP 32	-5°C - 55°C	600	711*51*40*
HCVA 300/800	230 VAC / 25 VA	300 / 300	6,8 mm/sec	2000 N	IP 32	-5°C - 55°C	800	811*51*40*
HCVA 500/350	230 VAC / 30 VA	500 / 500	6,8 mm/sec	2000 N	IP 32	-5°C - 55°C	350	586*51*40*
HCVA 500/600	230 VAC / 30 VA	500 / 500	6,8 mm/sec	2000 N	IP 32	-5°C - 55°C	600	711*51*40*
HCVA 500/800	230 VAC / 30 VA	500 / 500	6,8 mm/sec	2000 N	IP 32	-5°C - 55°C	800	811*51*40*


Maximale Drucklast der Kette / max. pressure load of the chain

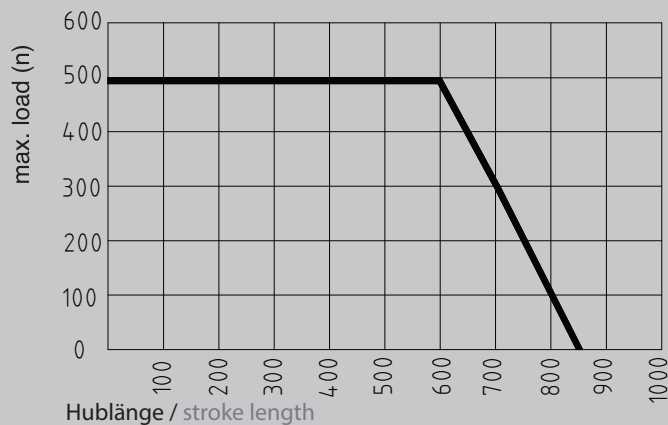

Anwendungsbeispiele / application sample

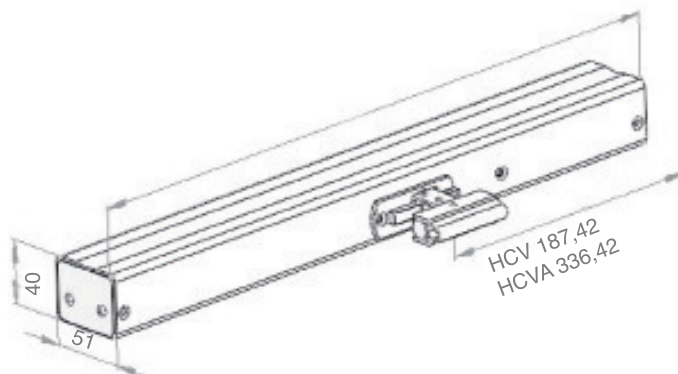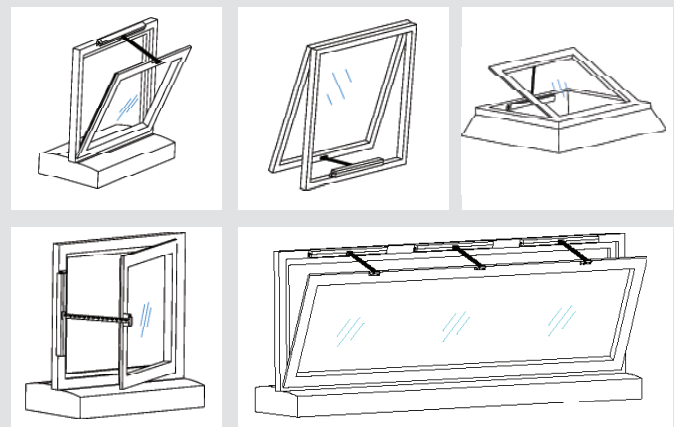

Standard Konsolensatz / Standard bracket set
HMB - HCV

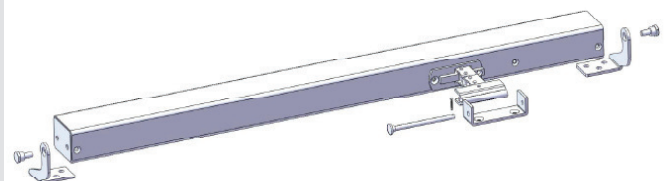

Gesamtlänge wie in den Abmessungen angegeben
total length as shown in the table above